

Technical Data ComBricks Fiber Optic Ring XM1 (101-201532)

Dimensions and weight	
Dimensions L x W x H	146 x 25 x 101 mm (including backplane)
Weight	121 g (excluding plug-able fiber optic connector and packing material)
Mounting DIN-rail type	35mm x 7,5mm (EN 50022, BS 5584, DIN 46277-3)
Ambient conditions	
Operating temperature range	0° to +60° Celsius (for mounting position see manual) 32° to +140° Fahrenheit
Isolation class	IP 20 (IEC/EN 60529, DIN 40050)
Backplane	
PROFIBUS networks	4 (set by dipswitches or web server)
Modules	Max. 10 (positioned in the first 10 slots)
Power supply	Provided through the backplane
Typical backplane current at 5.75 VDC	400 mA (at 5.72 VDC)
Max. backplane current at 5.75 VDC	600 mA (at 5.72 VDC) At this current consumption the module is switched OFF from backplane. Occurs when module is faulty, e.g. internal short circuit.
Compatible backplane units	101-200011, 101-200022, 101-200023, 101-200024, 101-200027

Protocol specifications

Supported Protocols DP-V0, DP- V1, DP-V2, FDL, MPI, FMS, PROFIsafe, PROFIdrive and any other FDL based protocol

Address No bus address required

Transmission speed 9.6 kbps ... 12 Mbps (including 45.45 kbps)

Transmission speed detection time Auto detect (< 10 s detection and 50 s baudrate switchover time)

Total delay ring structure

$$T_{\text{SLOT}} \geq \text{Max}_{\text{TSDR}} + ((\text{FO}_{\text{length}} \times \text{FO}_{\text{delay}}) + (\text{N}_{\text{FO-modules}} \times \text{N}_{\text{delay}})) \times 2$$

$\text{FO}_{\text{length}}$ = Total length of fiber optic cable in the ring in km
 FO_{delay} = Delay of fiber optic cable per km in bit times (see table)
 $\text{N}_{\text{FO-modules}}$ = Number of fiber optic modules in the ring
 N_{delay} = Delay of one fiber optic module (see table)

The delay time is multiplied by 2 for a request and response message.

Baudrate	Max _{TSDR} [Tbit]	FO _{delay} [Tbit/km]	N _{delay} [Tbit]
12 Mbps	800	60	47
6 Mbps	450	30	25
3 Mbps	250	15	14.5
1.5 Mbps	150	7.5	9
500 kbps	100	2.5	5
187.5 kbps	60	0.94	4.5
93.75 kbps	60	0.47	4.5
45.45 kbps	400	0.23	4.5
19.2 kbps	60	0.1	4
9.6 kbps	60	0.05	4

Note

$\text{FO}_{\text{delay}} = (\text{FO}_{\text{cable_length}} / \text{FO}_{\text{cable latency}}) / \text{Bit}_{\text{time}}$

example FO_{delay} , 1km, 1.5Mbps:

$(1000 \text{ m} / 200 \text{ } \mu\text{sec/m}) / 0.666 \text{ } \mu\text{sec} = 7.5 \text{ Tbit/km}$

Example 1: 1.5 Mbps, 5 km FO cable (total ring length), 6 FO ring modules

$T_{\text{SLOT}} \geq \text{Max}_{\text{TSDR}} + ((\text{FO}_{\text{length}} \times \text{FO}_{\text{delay}}) + (\text{N}_{\text{FO-modules}} \times \text{N}_{\text{delay}})) \times 2$

$T_{\text{SLOT}} \geq 150 + ((5 \times 7.5) + (6 \times 9)) \times 2 \geq 333 \text{ bit times}$

Example 2: 6 Mbps, 25 km FO cable (total ring length), 10 FO ring modules

$T_{\text{SLOT}} \geq \text{Max}_{\text{TSDR}} + ((\text{FO}_{\text{length}} \times \text{FO}_{\text{delay}}) + (\text{N}_{\text{FO-modules}} \times \text{N}_{\text{delay}})) \times 2$

$T_{\text{SLOT}} \geq 450 + ((25 \times 30) + (10 \times 25)) \times 2 \geq 2450 \text{ bit times}$

Jitter per message frame

0.0625 Tbit at 9.6 Kbps - 3 Mbps
 0.125 Tbit at 6 Mbps
 0.25 Tbit at 12 Mbps


Deviation

2 Tbit times for received messages is allowed and is corrected to nominal speed when transmitted (*over the complete message*)

Fiber optic specifications

Fiber Optic wavelength	Multimode and Singlemode 1310 nm
Cable type	Multimode Fiber G62.5 (50) / 125 μm (OM1)
Cable length	Multimode Max. 5 km (baudrate independent) Single mode Max. 30 km (baudrate independent)
Optical budget	Multimode 13 dB and Singlemode 17 dB
Optical Loss	Multimode 2 dB per km and Single mode 0.4 dB per km
Connectors	4 x ST/BFOC (2 channels)
Topologies	Ring, point-to-point (direct, hub, split, star)
Cascading depth	No limit, only busparameter limitation of the master

Dipswitches

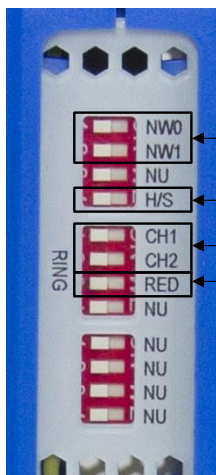

Network selection

Network 1: NW0 = Left, NW1 = Left
 Network 2: NW0 = Right, NW1 = Left
 Network 3: NW0 = Left, NW1 = Right
 Network 4: NW0 = Right, NW1 = Right











Use dipswitches or server settings (Left = DIP, Right = SERVER)

Enable or disable channel 1 or 2 (Left = ON, Right = OFF)

Ring Redundancy or Line (Left = RING, Right = LINE)

NU = not used

LEDs

	OFF	Blinking	ON
RDY	 Module has NOT been powered / initialized yet.	 Head Station is initializing or updating the module.	 Module has been initialized and is operational
RX1 / RX2	 NO signal, or NO valid telegrams detected on this channel, or channel is off.	 1 or more devices are communicating on this channel.	 A fiber optic cable is connected and link is established correctly
LV1 / LV2	 Signal quality is good, or channel is off.	Not possible	 Low signal, received messages can still be decoded
ER1 / ER2	 No errors, or channel is off.	Not possible	 No baudrate detected or no connection/signal

Standard and approvals

CE	EMC Directive 2014/30/EU, class B Digital Device RoHs Directive 2011/65/EU
FCC	47 CFR 15, Unintentional Radiator, class B Digital Device.
UL	Report reference: E468970 Standards for safety: UL 508 - Industrial Control Equipment CSA C22.2 No. 142-M1987 - Industrial Control Equipment

Others

Head Station firmware	At least version 1.288
-----------------------	------------------------